


The use of Pin with Ball

Indication:

Pathologies of the hand, wrist, foot, and ankle

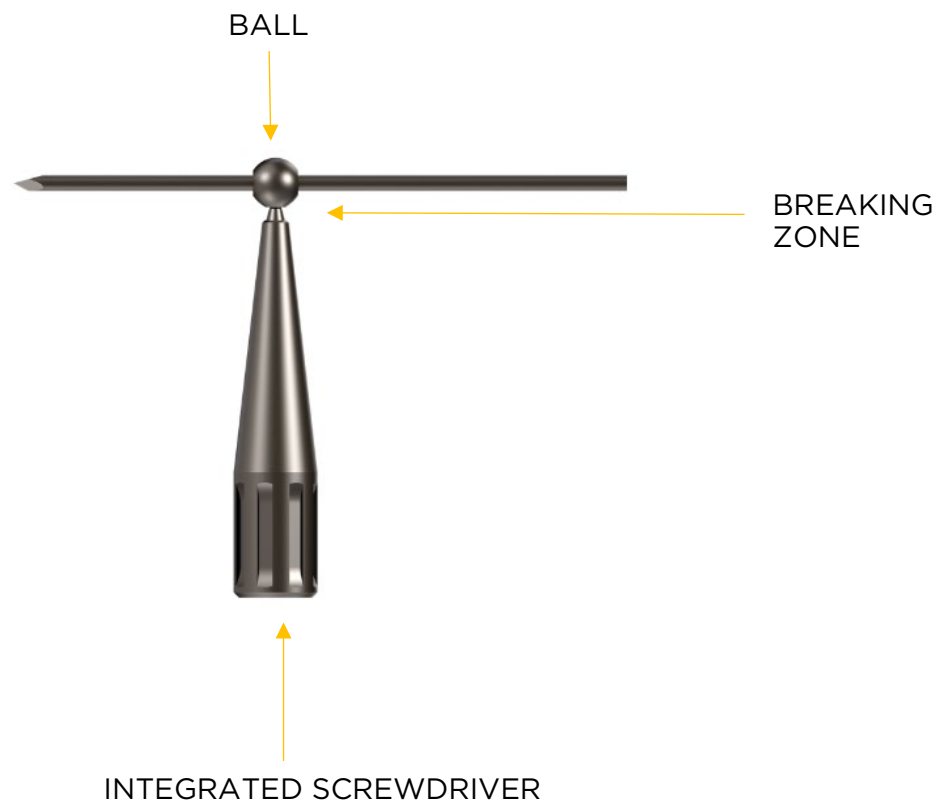

- Insert the pin (to the motor)
- Slide the ball on the pin
- The pin is cut at desired location
- The ball is placed at the end off the pin
- With the integrated screwdriver fix the ball (by screwing until the ball is blocked)
- By continuing to screw in the same direction the tip of the screwdriver breaks flush with ball

The ball can be left outside or under the skin.